

---

S U P P L Y I N G   C L E A N   A I R   T O   I N D U S T R Y

**MODEL M66 R&L**  
**Media Air Cleaner**



*The M66 is a self-contained media air cleaning system designed for general background or ducted for source capture applications. The M66 can be ordered with three-stage filtration which will effectively remove a broad range of airborne contaminants including fine dusts, smoke, soot, vapors, mist, VOC's and more at a rate of up to 3200 cfm.*



**For further information:**

**BERRIMAN ASSOCIATES**  
**1-800-480-3630**  
**[www.berriman.com](http://www.berriman.com)**

# M66 R&L FEATURES & SPECIFICATIONS

**DIMENSIONS:** 27 1/2" H x 26 1/2" W x 56" L

**WEIGHT:** 250 lbs. installed  
297 lbs. shipping weight

**CABINET:** 16-gauge welded steel cabinet with baked enamel textured coated finish.

**POWER INPUT:**

Voltage	Phase	1 HP Amps	2 HP Amps	3 HP Amps
110-120	1	12	NA	NA
208-240	1	6.6	9	NA
208-240	3	3.8	7	9
440-480	3	1.9	3.5	4.4

**PRIMARY FILTER:** 24" x 24" x 22", 8 pocket, 66 sq. ft. of synthetic media. Optional filters can increase filter media to 200 sq. ft.

**AIRFLOW/EFFICIENCY:**

Stock Number	Filter	CFM = Cubic Feet Per Minute		
		1 HP	2 HP	3 HP
41072	95% Bag	1940 CFM	2620 CFM	3020 CFM
41056	85% Bag	2030 CFM	2675 CFM	3150 CFM
41055	65% Bag	2150 CFM	2800 CFM	3170 CFM
41057	50% Bag	2190 CFM	2830 CFM	3200 CFM
41061	35% Bag	2210 CFM	2850 CFM	3225 CFM

**AMBIENT TEMP:** 175°F Maximum

**MOUNTING:** Standing or hanging cabinet with horizontal airflow. Ceiling mount brackets – standard.

**PREFILTER:** 30-35% efficient pleated filters, 24" x 24" x 4". Filter media is a cotton and synthetic blend. Total prefilter media area is 29.5 ft.

**MOTOR:** 1 HP sealed ball bearings and thermally protected. Adjustable motor sheave allows for field adjustments to the rated airflow.

**BLOWER:** Forward curved, ball bearing, belt driven centrifugal blower. This blower is capable of moving 4400 cfm free air.

**INSTRUMENTATION:** **Dirty Filter Gage** – Factory installed pressure gage designed to determine filter replacement cycle.

**Indicator Light** – Light indicates that the blower motor is energized properly.

**FILTER ACCESS:** Side load track system with hinged access door.

**SOUND LEVELS:** 70 dBA at 15 ft., 73 dBA at 9 ft.


## STANDARD FEATURES:

- 36-month parts warranty.
- 1 HP maintenance-free motor.
- Dirty filter gauge.
- 10 ft. power cord with molded plug.
- Completely prewired including 3 phase.

## OPTIONAL ACCESSORIES:

- 2, 3 and 5 HP BI blower packages
- Silencer.
- Extended service filters.
- HEPA and electrostatic add-on modules.
- Wrap around prefilter.
- Minihelic® filter gauge.
- Source capture plenums.
- 45 or 90 lbs of activated carbon
- Impinger assembly
- Oil mist bag filter
- 65% pre filter

M66L SHOWN WITH OPTIONAL 45 LB. CARBON MODULE & E.S.F. FILTER

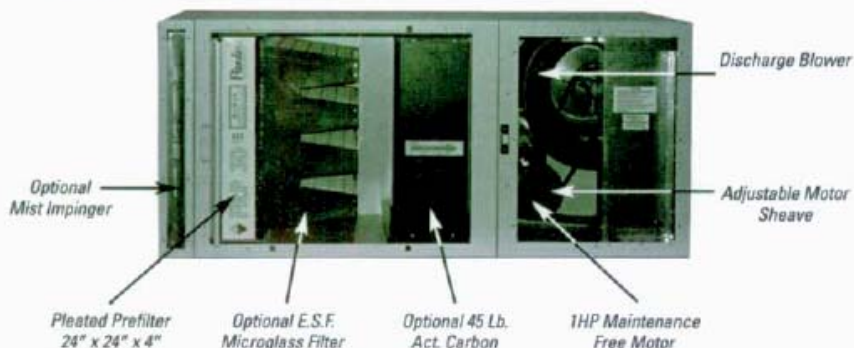

For further information:

**BERRIMAN ASSOCIATES**

**1-800-480-3630**

**www.berriman.com**

Manufacturer has a policy of continuing product improvement and reserves the right to make changes in design and specification without notice.

PN51576 11/02